

LUBRICANT CHARACTERISTICS

INTERNATIONAL DESIGNATION

OLIOFIAT PRODUCTS

Engine oil
API service CD-CCM PDI
according to MIL-L-2104 C specification

VS Diesel (SAE 10W-20W-30-40)
VS Diesel (SAE 15 W 40)

SAE 80W/90 EP oil

TUTELA W90/M-DA

SAE 85W/140 EP oil for differential
according to MIL-L-2105 C - API GL 5 specification

TUTELA W 140/M-DA

SAE 80W/90, non EP oil containing
antiwear additives for manual gearbox

TUTELA ZC 90

Hydrostatic transmission oil
A.T.F. Dexron II

TUTELA GI/A

Lithium-base grease
N.L.G.I. No. 2


TUTELA MR 2

Lithium-base grease
N.L.G.I. No. 3

TUTELA MR 3

Hydraulic brake and clutch control fluid
according to FMVSS No. 116 standards
ISO 4925
SAE J 1703
CUNA NC 956-01
IVECO STANDARD 18-1820

TUTELA DOT SPECIAL

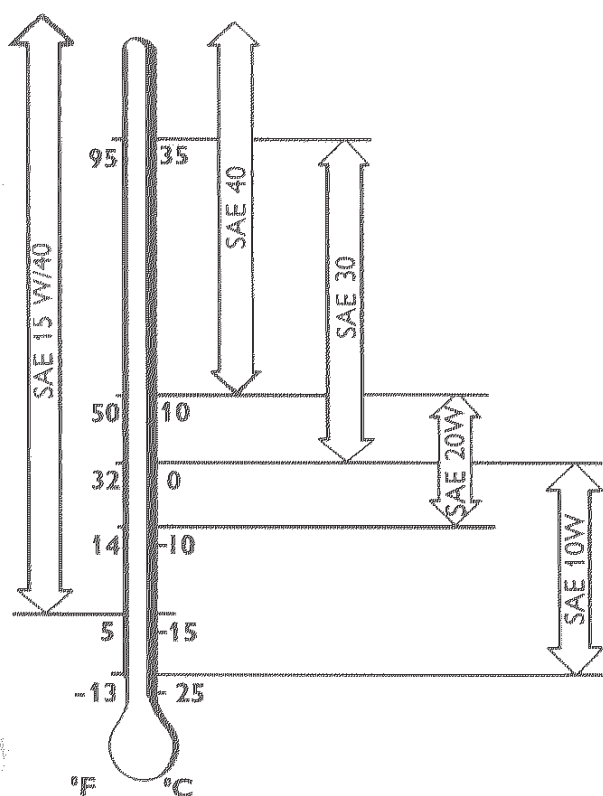

ENGINE OIL USE

For efficient engine operation SAE viscosities should be as indicated in relation to outdoor temperature.